


### 2.3.2 Magnesium Disc Anode Alloy AZ63

- They are used to protect the internal section of water boxes in heat exchangers.

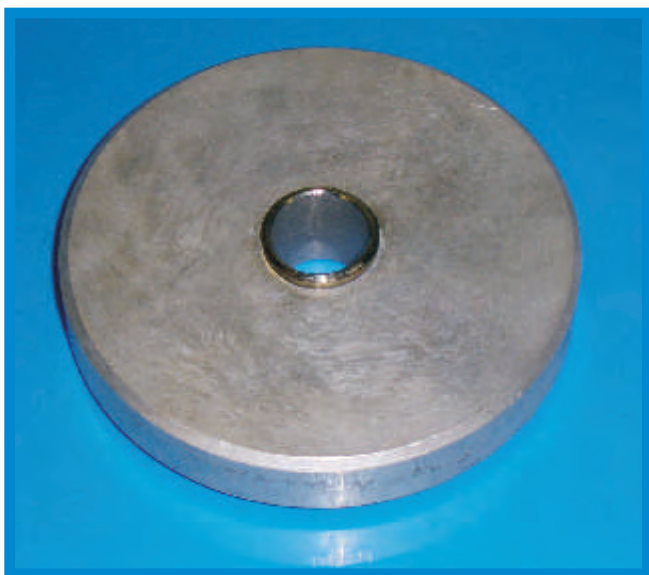

#### Anode Size:

100mm, 120mm and 200mm diameter with standard thicknesses from 15mm to 50mm.

All anodes have a 16mm ID SS tube cast in the centre. Other anode sizes are available on request. Individual anode weights vary from 0.2kg to 2.74kg.

**How to order:** Please quote anode diameter and thickness, or alternatively the anode weight.

| D   | H (mm) | Wt. (kg) |
|-----|--------|----------|
| 100 | 15     | 0.205    |
|     | 20     | 0.27     |
|     | 30     | 0.410    |
|     | 40     | 0.52     |
|     | 50     | 0.68     |
| 120 | 20     | 0.394    |
|     | 30     | 0.590    |
|     | 40     | 0.788    |
|     | 50     | 0.983    |
| 200 | 50     | 2.74     |

